

zenithinteriors.com

# RAYS Hanging Divider

## Zenith



### Features:

A compact acoustic room divider featuring a high-opaque design compared to other acoustic elements in the same range. The triangular cut-out pattern, based on parametric design, creates a mesmerizing effect that inevitably stand to catch the eye of anyone passing by.

**Design:** IMPACT ACOUSTIC

### Environmental:

- Cradle to Cradle Certified™
- Product qualifies for LEED v4 specifications on VOC emissions in LEED EQ credit
- Supported by Climate KIC

**Warranty:** 12 year product

### Finishes:

































100% PET (min. 60% post-consumer)

ARCHISONIC® is a high-performance sustainable acoustic absorber made from up-cycled plastic bottles.

ARCHISONIC® is manufactured at the highest quality standards, yet slight colour and surface deviations caused by the high degree of recycled fiber are an inevitable part of the product characteristics and do not claim warranty services.

Material varies in colour when shown in monitor or in print.

### ARCHISONIC:

					
Shell Pink 102	Jute 920	Soft Coral 516	Ice Blue 304	Winter Sky 410	Spearmint 706
					
Succulent 712	Pacific Ocean 432	Marine Blue 864	Deep Sea 918	Midnight 810	Moss 439
					
Nordic Pine 311	Grove 317	Sunshine 846	Honeycomb 139	Warm Stone 105	Linen 107
					
Terracotta 239	Electric Orange 464	Hot Pink 140	Poster Red 662	Grape 540	Garnet 724
					
Snow White 500	Cloud 103	Milk 404	Smoke 442	Ground 108	Slate 444
					
Charcoal 542	Raven 550				

## Sound Absorption:

DIN ISO 11654

24 mm


aw 0.55 (no airgap)

aw 0.65 (50 mm / 2" air gap)

aw 0.90 (100 mm / 4" air gap)

aw 0.95 (200 mm / 8" air gap)

aw 0.95 (300 mm / 11" air gap)

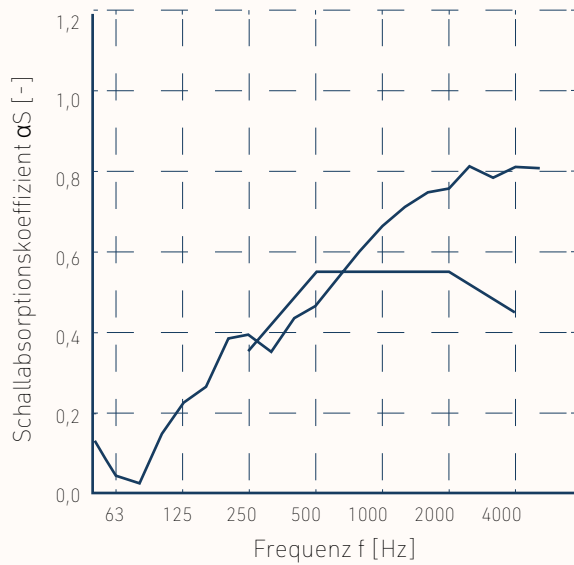

## Dimensions




### Rays Division.29 24

OW 1800mm

OH 2400mm

Thickness: 24mm

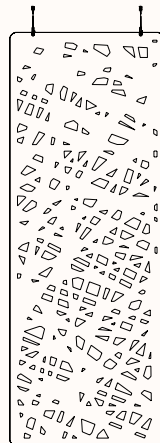

### Rays Division.30 24

OW 900mm

OH 2400mm

Thickness: 24mm



### Rays Division.29 12

OW 1200mm

OH 2800mm

Thickness: 12mm