

zenithinteriors.com

ORA Acoustic light Zenith

Features:

Both with the acoustics and with our lighting technology, we make no trade-offs. Ora is the best example of the symbiosis of both worlds: Optimal acoustics above workplaces and at the same time a light that meets the highest demands for the professional sector.

Design: IMPACT ACOUSTIC

Environmental:

- Cradle to Cradle Certified™
- Product qualifies for LEED v4 specifications on VOC emissions in LEED EQ credit
- SUPPORTED BY CLIMATE KIC

Warranty: 12 year product & 2 year lighting

Finishes:




























100% PET (min. 60% post-consumer)

ARCHISONIC® is a high-performance sustainable acoustic absorber made from up-cycled plastic bottles.

ARCHISONIC® is manufactured at the highest quality standards, yet slight colour and surface deviations caused by the high degree of recycled fiber are an inevitable part of the product characteristics and do not claim warranty services.

Material varies in colour when shown in monitor or in print.

ARCHISONIC:

					
Shell Pink 102	Jute 920	Soft Coral 516	Ice Blue 304	Winter Sky 410	Spearmint 706
					
Succulent 712	Pacific Ocean 432	Marine Blue 864	Deep Sea 918	Midnight 810	Moss 439
					
Nordic Pine 311	Grove 317	Sunshine 846	Honeycomb 139	Warm Stone 105	Linen 107
					
Terracotta 239	Electric Orange 464	Hot Pink 140	Poster Red 662	Grape 540	Garnet 724
					
Snow White 500	Cloud 103	Milk 404	Smoke 442	Ground 108	Slate 444
					
Charcoal 542	Raven 550				

Sound Absorption:

DIN ISO 11654

24 mm


aw 0.55 (no airgap)

aw 0.65 (50 mm / 2" air gap)

aw 0.90 (100 mm / 4" air gap)

aw 0.95 (200 mm / 8" air gap)


aw 0.95 (300 mm / 11" air gap)

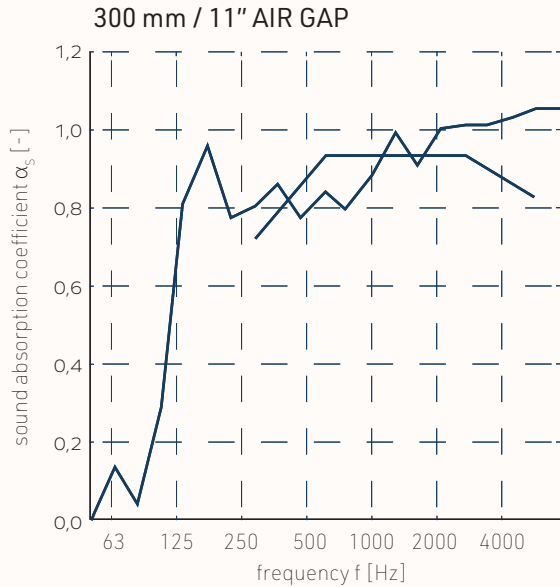

Key Data:

Voltage	220 - 240 V
Dimming	Not dimmable
Light distribution	Direct
Total power	29W
Colour temperature	4000K
Luminous flux of the luminaire	2700 lm
Luminous flux of the light source	4150 lm
Colour renderingindex (CRI)	90
Case colour	Black
Protection class	I
Life Span	> 50'000 h (L70 B50)
Colour Consistency	SDCM3

Dimensions




Ora 1530 Linear Light

OW 1800mm

OD 1800mm

OH 12mm

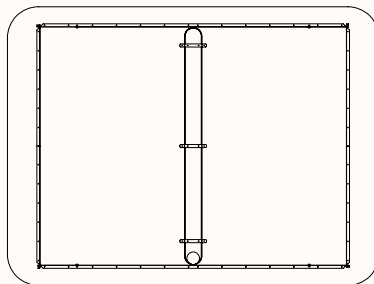


Ora 1530 Linear Light

OW 1800mm

OD 2400mm

OH 12mm

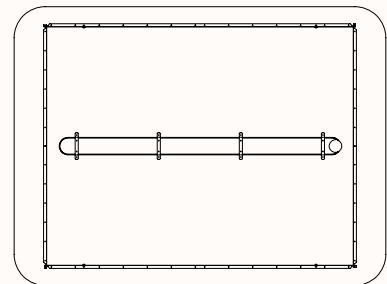

Ora 1815 Linear Light

OW 1800mm

OD 2400mm

OH 12mm