
Environmental Product Declaration

Zenith

In accordance with ISO 14025 for:

Precinct Screens



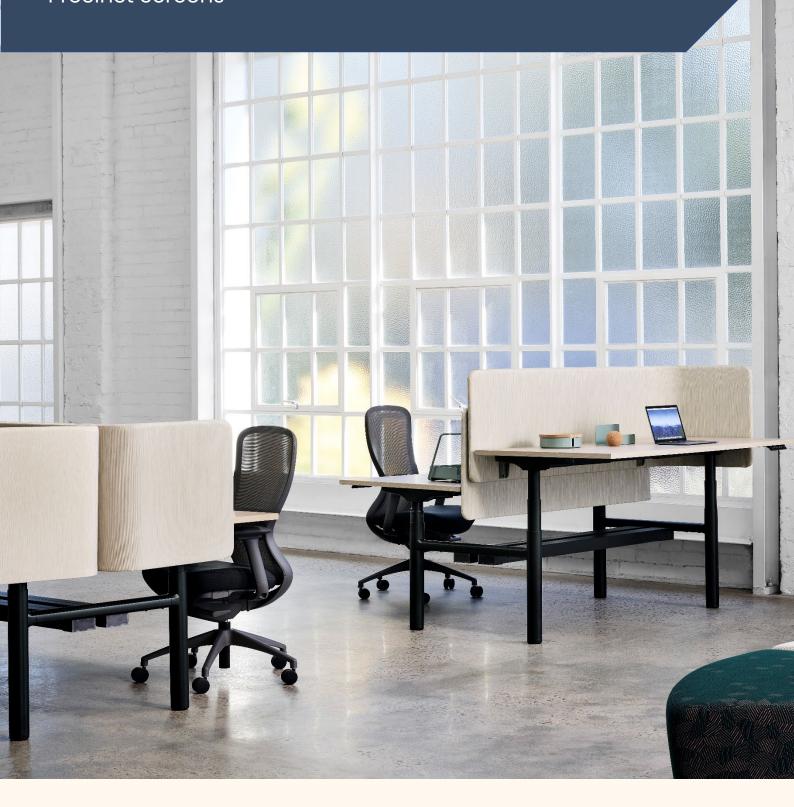

Environmental Product Declaration (EPD)

in accordance with ISO 14025 EPD Registration No. S-P-04645 | Version 1.0 Issued 14/10/2021 | Valid until 14/10/2026

Company Information

Zenith Interiors designs, manufactures, and distributes leading-edge products for corporate and commercial environments that inspire people and organisations to excel (Zenith Interiors, 2019).

Product-related or management system-related certifications:

ISO 9001 - Quality management systems

ISO 14001 - Environmental Management Systems

AS 4801 Health and Safety

Name and location of production site: Zenith Interiors, Shanghai, China.





Precinct Screens

Precinct is a 9-30 mm soft and frameless screen solution that is highly functional and aesthetically pleasing, creating clean and defined workspaces. Available in many shapes sizes and fixings.

Product Names: Precinct Hold On, Precinct Flex, Precinct Divide, Precinct Fold Me.

UN CPC code: 3812/3813/3814 (EPD International, 2019).

Geographical scope: Final product produced in Shanghai, China for the Asian market.

LCA Information

Functional unit / declared unit: One Precinct screen with length 1.8 m, depth 0.7 m, width 0.03 m.

Scope: Cradle to grave life cycle of one Precinct screen.

Reference service life: 15 years (EPD International, 2019).

Databases and LCA software used: AusLCI 2.2, ecoinvent 3.6, Industry Data 2.0 databases; SimaPro 9.1.0.11 software

<u>Data collection period:</u> July 2019 – February 2020



An Environmental Product Declaration, or EPD, is a standardised and verified way of quantifying the environmental impacts of a product that is based on a consistent set of rules known as Product Category Rules (PCR). EPDs within the same product category from different programs may not be comparable. This EPD is for a specific furniture product and follows the Product Category Rules 'Furniture, except seats and mattresses v2.01'.

Declaration Owner:

Zenith Interiors

Web: zenithinteriors.com Email: info@zenithinteriors.com

Phone: 1300 013 013

EPD produced by:

Good Environmental Choice Australia (GECA)

Web: geca.eco

Email: enquiries@geca.org.au

Phone: 02 9699 2850

EPD program operator:

The Australaisan EPD® Programme Ltd

Web: www.epd-australasia.com Email: info@epd-australasia.com

Post: c/o Kendons Chartered Accountants PO Box 31045, Lower Hutt 5040, New Zealand

PCR Information

PCR:

Product Category Rules 'Furniture, except seats and mattresses v2.01'.

PCR review conducted by:

Text

Independant verification of the declaration and data, according to ISO 14025:

☐ EPD process certification (Internal)

EPD verification (External)

Third party verifier



Accredited or approved by: The Australasian EPD® Programme

Product Information

The Precinct screen is used in workspaces to achieve an aesthetically pleasing and clean environment. It can be easily fitted to workstations and tables and acts as a partition.

The analysed product consists of a screen with a length of 1.8 m, depth of 0.7 m and width of 0.03 m. The materials used are sourced from different suppliers in Australia and transferred to Zenith's Melbourne factory for the manufacturing of the final product.

The final manufacturing process includes powder coating of the metals where the surfaces are first cleaned, then go through a powder coating process after which they are cured with heat. The rest of the components are assembled in the factory.

Background Data

Australian inputs were primarily modelled with the AusLCI database; the ecoinvent v3 database was used where suppliers were from overseas. All background data used was less than ten years old.

1. System Boundaries and Life Cycle Stages

Life Cycle Stages

This Environmental Product Declaration analyses the production of a Precinct screen, including the raw material extraction, the manufacture of components from suppliers, the assembly of the screen as well as the end of its service life. The different Precinct screen components are transported to Sandringham, Victoria where the screen is assembled. The product is then packed in cardboard boxes and supplied to showrooms as well as clients in Australia.

Table 1: Life cycle stages of Precinct screen

Process	Module	Description	Life cycle stages	Declared
				modules
Upstream	Al	Raw materials supply	A1-A3: Manufacturing stage	X
process	A2	Components/raw materials manufacture		X
Core process	A3	Components transport to Zenith factory		X
•	A4	Manufacturing of final products		X
Downstream	B1	Transport of final product	B1: Final product transport	X
process	B2	Maintenance	B2-B4: Usage stage	Х
	В3	Replacement		X
	B4	Operational energy use		X
	Cl	Transport	C1-C3: End-of-life	Х
	C2	Manual dismantling		X
	C3	Waste disposal		X
Other Environment al Stage	D	Recycling	Other Environmental Stage	X

System Diagram

An 'upstream – core – downstream' flow is adopted in this study. The upstream processes include the flows of raw materials. The core processes include all activities which the manufacturing organisation is in control of, i.e. transportation of the components to the manufacturing factory and the actual process of manufacturing. The downstream processes include the steps that are controlled by the user and the disposal or recycling options of the products.

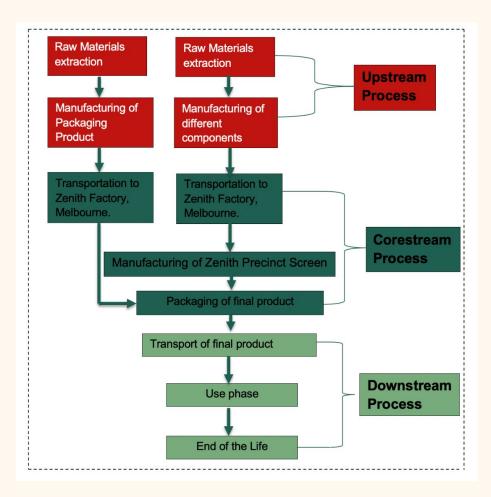


Figure 1: Process diagram Precinct screen

End-of-life Scenarios

Zenith Interiors operates a take-back scheme for its furniture. Likewise, furniture owners resell or donate the furniture by themselves to extend its lifetime. In the end-of life for other environmental stages (represented as modules D), all aluminium and steel parts of the product are recycled after being manually dismantled. This is noted separately due to Polluter pays principle (PPP).

Data Quality, Temporal Scope and Geographical Scope

The modelling of Zenith products is of high quality as detailed company specific data about the product components, component suppliers, the annual energy consumption and the annual production rate was provided for this study. Data for upstream and downstream processes are retrieved from suitable averages in the AusLCI and ecoinvent databases.

The temporal scope of the study is the period for which the data was collected. The data collection process started with the visit to Zenith's Melbourne factory in July 2019. The energy consumption data taken into consideration range from September 2018 to 2019. The production volume data is for 2019. For the background data, temporal scope for AUSLCI VI.33, a shadow database of modified ecoinvent 2.2 processes is July 2020. For ecoinvent 3.6 the temporal scope is September 2019.

Table 2: Data sources, geographical scope and data quality

Materials/fuels		Module	Data source	Geographical scope	Data quality	
Raw	Fabric for logo and cover	A1, A2	Information provided by	Australia	High	
materials	Steel for screws		Zenith Interiors		quality	
supply,	MDF board					
components	Foam					
/ raw	Aluminium for zipper					
materials	Packaging of final product					
manufacture , packaging (Upstream Process)	Packaging from suppliers					
Components	Transportation of MDF board	A3, A4	Information provided by	Australia	High	
transport to	Transportation of foam		Zenith Interiors		quality	
Zenith	Transportation of zipper					
factory,	Transportation of metal					
manufacturi	screw					
ng of final	Transportation of fabric					
products	Electricity consumption					
(Corestream	Natural gas consumption					
Process)	Zanith Malla assume for the make	D1	A	A b P	N 4 15	
Transportati on of final	Zenith Melbourne factory to client	B1	Assumption of average distance of 1,000 km	Australia	Medium	
product	Client		according to Product		quality	
(Downstrea			Category Rules			
m Process			outogory rules			
Usage stage (Downstrea m process)	Maintenance	B2	Precinct screen does not require extra resources for maintenance apart from time-to-time manual dust cleaning.	Australia	High quality	
	Replacement	B3	Not required		High quality	
	Operational energy use	B4	Not required		High quality	
End-of-life	Transport	C1	Assumption of average	Australia	Medium	
(Downstrea			distance of 1,000 km		quality	
m Process)	Manual dismantling	C2	No impacts observed for		Medium	
			manual dismantling		quality	

	Waste disposal	C3	Complete product along	Medium
			with packaging ends up	quality
			in landfill.	
Benefits from	Recycling	D	Aluminium and steel	Medium
recycling			parts are recycled.	quality
(Other life	Manual dismantling	D2	No impacts observed for	Medium
cycle			manual dismantling	quality
stages)				

Allocations

No allocation between co-products in the core module was necessary as there were no co-products created during manufacturing.

The methodological choices for allocation for reuse, recycling and recovery have been set according to the polluter pays principle (PPP). This means that the generator of the waste shall carry the full environmental impact until the point in the product's life cycle at which the waste is transported to a scrapyard or the gate of a waste processing plant (collection site). The subsequent user of the waste shall carry the environmental impact from the processing and refinement of the waste, but not the environmental impact caused in the earlier life cycles. The cut-off system model from ecoinvent was used. Any allocations in the AusLCI unit system and Industry Data 2.0 were adopted.

Content Declaration

The major component of the Precinct screen is a medium density fibre (MDF) board. The screen is covered with a comfort foam and fabric and fixed with steel screws.

Table 3: Materials used for Precinct screen

Materials	Quantity	Unit
Fabric: polyester	0.237	kg
Steel	0.076	kg
Polyurethane foam	0.105	kg
Medium Density Fibreboard	0.129	m³
Aluminium	0.053	kg

Table 4: Energy consumption per product

Energy consumption	Quantity	Unit
Electricity	0.56	kWh
Gas usage	0.247	MJ

Environmental Performance

Environmental Impact Assessment Methods

Table 5: Overview of environmental impact assessment methods used in the study

Impact category		Unit	Assessment method			
Global	Fossil	kg CO ₂ eq.	Greenhouse Gas Protocol V1.02			
warming potential	Biogenic	kg CO ₂ eq.				
(GWP)	CO ₂ eq. from land transformation	kg CO ₂ eq.				
	Total	kg CO₂ eq.				
Abiotic dep	letion	kg Sb eq.	CML-IA baseline V3.6			
Abiotic dep fuels)	letion (fossil	MJ				
Ozone layer (ODP)	r depletion	kg CFC-11 eq.				
Photochem	ical oxidation	kg C ₂ H ₄ eq.	Recipe 2008 Midpoint			
Acidification	n	kg SO ₂ eq.	CML-IA baseline V3.6			
Eutrophicat	ion	kg PO₄³- eq.				
Water use		m³	AWARE VI.01			
Land use		species.yr	Recipe 2016 Endpoint VI.04			
Human toxi	city, cancer	CTUh	USEtox 2			
Human toxi	city, non-cancer	CTUh				
Freshwater	ecotoxicity	CTUe				
Radioactive	e waste	kg	EDIP 2003 method			
Hazardous	waste	kg				
Non-hazara	dous waste	kg	EDIP 2003 method (Sum of Bulk waste and Slag waste)			
Primary energy resources	Use as energy carrier	MJ	Cumulative Energy Demand V1.11 method: calculated as sum of renewable – biomass, renewable – wind, solar, geothermal, and renewable – water.			
Renewabl e	Use as raw materials	MJ	Indicator not assessed (INA)			
Primary energy resources	Use as energy carrier	MJ	Cumulative Energy Demand V1.11 method: calculated as sum of non-renewable – fossil, non-renewable – nuclear, and non-renewable – biomass.			
Non- renewabl e	Use as raw materials	MJ	Indicator not assessed (INA)			
Secondary material resources		kg	Indicator not assessed (INA)			
Renewable	secondary fuels	MJ	Indicator not assessed (INA)			
Non-renew fuels	able secondary	MJ	Indicator not assessed (INA)			
Net use of f	resh water	m³	Recipe 2016 Midpoint V1.04			

Life Cycle Impacts

Table 6 shows the environmental impacts of the Precinct screen with respect to upstream, core and downstream processes, including all processes listed in Table 1. The downstream processes are divided into the two end-of-life scenarios described in chapter 7.

Table 6: Life cycle impacts - Precinct screen

Impact cate	agory	Unit	Upstream	Core	Downstream	Total	Other
Impact category		Offic	processes	processe	processes	Total	environme
			processes	s	with landfill		ntal stage-
				5	With Idilanii		
			41.40	40.44	D1 0.4		Recycling
	1		A1-A2	A3-A4	B1-C4		D
Global	Fossil	kg CO ₂	1.33E+01	7.78E-01	1.52E+01	2.92E+01	-1.10E+00
warming		eq.					
potential	Biogenic	kg CO ₂	-1.94E+01	1.45E-03	1.20E+01	-7.40E+00	-1.33E-03
(GWP)		eq.					
	CO ₂ eq. from	kg CO ₂	1.25E-03	5.27E-07	5.13E-05	1.30E-03	-4.51E-06
	land	eq.					
	transformation						
	Total	kg CO ₂	-6.10E+00	7.80E-01	2.72E+01	2.17E+01	-1.10E+00
		eq.					
Abiotic depl	letion	kg Sb	3.49E-05	6.62E-07	1.21E-05	4.76E-05	-3.46E-07
		eq.					
Abiotic depl	letion (fossil	MJ	1.61E+02	1.00E+00	2.05E+02	3.66E+02	-6.26E+00
fuels)							
Ozone layer	depletion (ODP)	kg	2.70E-07	7.06E-09	2.28E-06	2.56E-06	-2.47E-08
,	, ,	CFC-11					
		eq.					
Photochem	ical oxidation	kg	5.05E-02	1.74E-03	3.44E-01	3.96E-01	-3.29E-03
		NMVOC	0.002 02		02	0.002 0.	0.202 00
Acidification	<u> </u>	kg SO ₂	3.51E-02	7.77E-04	7.19E-02	1.08E-01	-2.53E-03
, totalloador		eq.	J.GIL 02	7.772 04	7.102 02		2.002 00
Eutrophicati	ion	<u> </u>	9.93E-03	2.59E-04	1.59E-02	2.61E-02	-4.91E-04
Eutrophicati	IOH	kg PO ₄ 3-	9.93E-03	2.09E-04	1.09E-02	2.01E-U2	4.91E-04
		eq.	0.015 : 0.0	0.015 . 0.0	0.505.01	0.005.00	0.405.01
Water use		m³	2.81E+02	3.21E+00	2.59E+01	3.09E+02	-2.48E+01

Table 7 below represents the resource use parameters of the Precinct screen.

Table 7: Resource use - Precinct screen

Impact cate	egory	Unit	Upstream processes	Core processes	Downstream processes with landfill	Total	Other environment al stage- Recycling
			A1-A2	A3-A4	B1-C4		D
Primary energy	Use as energy carrier	MJ	2.72E+02	3.80E-01	3.65E-01	2.72E+02	-6.49E-01
resources Renewabl	Use as raw materials	MJ	0	0	0	0	0
е	Total	MJ	2.72E+02	3.80E-01	3.65E-01	2.72E+02	-6.49E-01
Primary energy	Use as energy carrier	MJ	1.78E+02	1.08E+00	2.18E+02	3.96E+02	-6.66E+00
resources Non-	Use as raw materials	MJ	6.14E+00	0	0	6.14E+00	0
renewable	Total	MJ	1.78E+02	1.08E+00	2.18E+02	3.96E+02	-6.66E+00
Secondary r resources	material	kg	0	0	0	0	0
Renewable secondary fuels		MJ	0	0	0	0	0
Non-renewo	able secondary	MJ	0	0	0	0	0
Net use of fr	esh water	m³	6.52E+00	7.39E-02	6.03E-01	7.19E+00	-5.76E-01

The impacts on human toxicity cancerous, human toxicity non-cancerous, freshwater ecotoxicity and land use are given below in the Table 8.

Table 8: Other impacts - Precinct screen

Impact category	Unit	Upstrea	Core	Downstream	Total	Other
		m	processes	processes		environment
		processe		with landfill		al stage-
		S				Recycling
		Al-A2	A3-A4	B1-C4		D
Land use	species.yr	4.44E+00	1.87E-02	1.38E-01	4.07E-08	-3.29E-02
Human toxicity, cancer	CTUh	1.85E-08	2.12E-12	4.10E-10	1.88E-08	-7.03E-11
Human toxicity, non-	CTUh	4.37E-10	8.45E-13	2.16E-10	6.53E-10	-3.65E-11
cancer						
Freshwater ecotoxicity	CTUe	1.01E-01	9.13E-05	2.04E-02	1.22E-01	-7.75E-04


Table 9 below represents waste flow categories of the Precinct screen.

Table 9: Waste flow categories - Precinct screen

Impact category	Unit	Upstream	Core	Downstrea	Total	Other
		processes	processes	m		environment
				processes		al stage-
				with landfill		Recycling
		Al-A2	A3-A4	B1-C4		D
Radioactive waste	kg	3.89E-05	1.68E-08	3.16E-07	1.65E-03	-6.19E-08
Hazardous waste	kg	1.56E-03	1.75E-06	8.90E-05	8.02E+00	2.77E-05
Non-hazardous waste	kg	1.13E+00	2.24E-02	6.87E+00	3.92E-05	-1.26E-01

Table 10: Output flow categories - Precinct screen

Impact category	Unit	Upstream	Core	Downstream	Total	Other
		processes	processes	processes		environment
				with landfill		al stage-
						Recycling
		Al-A2	A3-A4	B1-C4		D
Reuse	kg	0	0	0	0	0
Materials for recycling	kg	0	0	0	0	0
Energy recovered	MJ	0	0	0	0	0
Energy exported	MJ	0	0	0	0	0
Energy exported, thermal	MJ	0	0	0	0	0

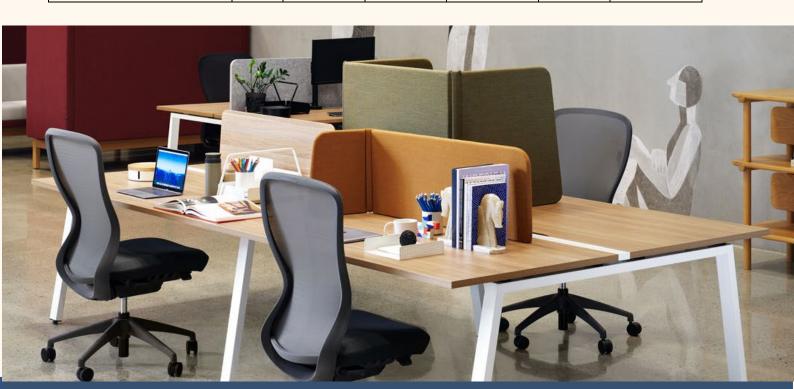

Zenithinteriors.com