

zenithinteriors.com

# VERSE 2

## Zenith

### Features:

Verse 2 offers a larger focus room, capable of comfortably catering to both an individual worker or a pair seeking a private setting within the open floor plan. It is fitted with a gallery rail to hang accessories, air ventilation & adjustable lighting. It can include a media panel and shelf for video conferencing, complemented by an optional SOL-Sit lounge across for seating.

Championing their sustainability commitment, Crafted Hardwoods will contribute to reforestation through OneTreePlanted for each Verse purchased with Crafted Hardwoods frames, For every Verse 2 sold, 2 trees will be planted.

### Options:

- 3 standard room sizes (WxD) with 2 available heights
- Media panel and shelf
- White board or cork board accessories
- 600W or 900W SOL-EDT lounges

**Design:** ZENITH DESIGN STUDIO

**Warranty:** 7 years

Exception:

2 Years - Whiteboard & Corkboard

2 Years - Electrical components including soft wiring

1 Year - Lighting elements

**Certifications:** GECA, 3 Green Star Credits for acoustics

### Finishes:

Frame :	Superior oak timber, Crafted Hardwood Timber Tasmanian Oak & Blackbutt (Converted low value, juvenile pulp turned into new hardwoods that look and feel like 100-year-old wood)
Shelf Option:	Natural White & Black Woodmatt Laminate
Front Wall Panel:	Laminated Glass 6.76mm
Glazed Door:	Frameless Toughened Glass 10mm
Internal Side Walls:	Fabric or Sonic Board
Internal Back Walls:	Laminated Glass 6.76mm, Fabric or Sonic Board
External Side Walls:	Fabric
External Back Walls:	Laminated Glass 6.76mm or Fabric
Ceiling Internal:	Sonic Board
Ceiling External:	Natural White Matt Laminate
Inner/Outer Floor Track:	Black - Satin ZPC_001
Upholstery in fabric categories A, B & C	Refer to Verse Select Fabric Specification

### Frame:



Superior Oak



Crafted Hardwood Tasmanian Oak



Crafted Hardwood Blackbutt



Natural White Matt Laminate



Black Woodmatt Laminate

### Sonic Board:



Light Grey ZPET\_004



Ash ZPET\_007



Olive ZPET\_010




Shadow ZPET\_011



Cloud ZPET\_012


**Dimensions:**

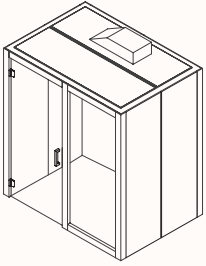

**Verse 2.1**

OW 1980mm  
 OD 1380mm  
 H 2200/2400mm (Frame)  
 OH 2370/2600mm (Including fan box)  
 Internal Room Size: 1800 x 1200mm


Side walls made up of:  
 2x 600mmW panels  
 Front & back walls made up of:  
 2x 900mmW panels

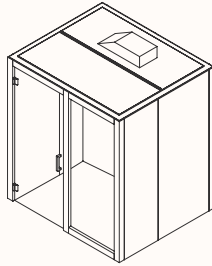

**Verse 2.2**

OW 1980mm  
 OD 1680mm  
 H 2200/2400mm (Frame)  
 OH 2370/2600mm (Including fan box)  
 Internal Room Size: 1800 x 1500mm

Side walls made up of:  
 1x 600mmW & 1x 900mmW panels  
 Front & back walls made up of:  
 2x 900mmW panels

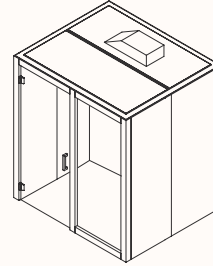


**Verse 2.3**


OW 1980mm  
 OD 1980mm  
 H 2200/2400mm (Frame)  
 OH 2370/2600mm (Including fan box)  
 Internal Room Size: 1800 x 1800mm

Side walls made up of:  
 2x 900mmW panels  
 Front & back walls made up of:  
 2x 900mmW panels


**Accessories:**




**White Board or Cork Board with Black or Dark Brown Leather Strap**  
 DIA: 600 & 900mm



**Gallery Rail**  
 White board or cork board are easily attached and relocated



**SOL-EDT 600**  
 OW 588mm  
 OD 690mm  
 SD 490mm  
 SH 450mm  
 OH 817mm




**SOL-EDT 900**  
 OW 888mm  
 OD 690mm  
 SD 490mm  
 SH 450mm  
 OH 817mm

**Door Handle Options:**




**Magnetic Pull Handle**




**Latch Lever**

**Back Panel (Internal) Options:**




**Option 1**

Glass & Fabric or Sonic Board Panel



**Option 2**


Fabric or Sonic Board Panels



**Option 3**


Glass Panels

**Front Panel Options:**




**Option 1**

LH: Door Panel  
LH: Door Hinges  
RH: Glass Panel




**Option 2**

RH: Door Panel  
RH: Door Hinges  
LH: Glass Panel



**Option 3**


LH: Door Panel  
RH: Door Hinges  
RH: Glass Panel



**Option 4**

RH: Door Panel  
LH: Door Hinges  
LH: Glass Panel


**GPO Panel:**

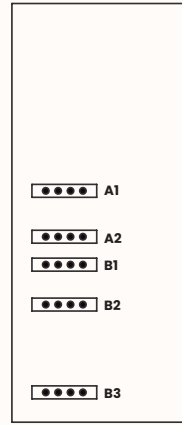

**Left Hand Side**

Panel: 600/900mmW


- A1: 1175mmH
- A2: 945mmH
- B1: 805mmH
- B2: 605mmH
- B3: 165mmH

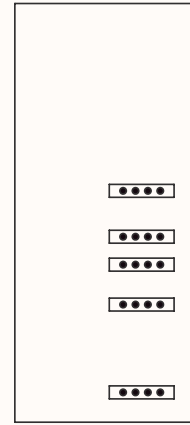

**Right Hand Side**

Mirrored

**Power Outlet Options:**



**GPO + HDMI + USB + DATA**



**2x GPO + HDMI + DATA**



**2x GPO + USB + DATA \***




**2x GPO + USB + HDMI**




**3x GPO + DATA \***



**3x GPO + HDMI**



**3x GPO + USB\***




**4x GPO\***

Note: \*not available as a power outlet option when a media panel has been selected.

## Media Panel: (Side Walls only)

TV & TV bracket not included



### Verse 2.1: Option 1A


Media Panel 2x 600mmW:

LH GPO, RH switch & RH shelf

Fabric or Sonic Board (Internal)

TV Bracket Height: 1175mm (Seated Level)

TV Size: 42" - 45"



### Verse 2.1: Option 1B


Media Panel 2x 600mmW:

RH GPO, LH switch & LH shelf


Fabric or Sonic Board (Internal)

TV Bracket Height: 1175mm (Seated Level)

TV Size: 42" - 45"

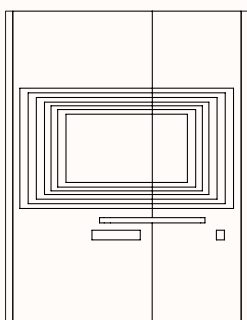

Door  
Side

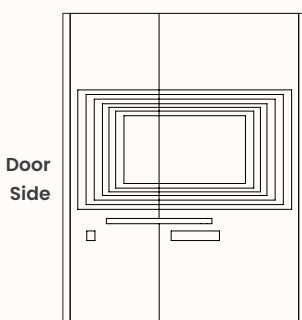

Door  
Side

### Verse 2.2: Option 2A

Media Panel RH 600mmW & LH 900mmW:

LH GPO, RH switch & RH shelf

Fabric or Sonic Board (Internal)

TV Bracket Height: 1175mm (Seated Level)

TV Size: 42" - 65"

### Verse 2.2: Option 2B


Media Panel LH 600mmW & RH 900mmW:

RH GPO, LH switch & LH shelf

Fabric or Sonic Board (Internal)

TV Bracket Height: 1175mm (Seated Level)

TV Size: 42" - 65"

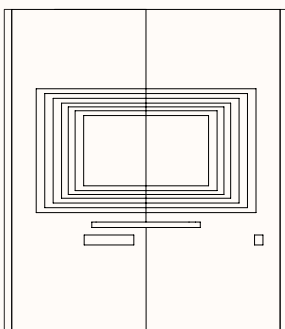

### Verse 2.3: Option 3A


Media Panel x2 900mmW:

LH GPO, RH switch & RH shelf

Fabric or Sonic Board (Internal)

TV Bracket Height: 1175mm (Seated Level)

TV Size: 42" - 65"

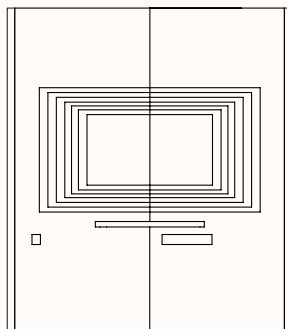

### Verse 2.3: Option 3B


Media Panel x2 900mmW:

RH GPO, LH switch & LH shelf

Fabric or Sonic Board (Internal)

TV Bracket Height: 1175mm (Seated Level)

TV Size: 42" - 65"




### Verse RH Shelf

OW 710mm

OD 330 & 180mm

OH 36mm

Installed Height: 720mm



### Verse LH Shelf

OW 710mm

OD 330 & 180mm

OH 36mm

Installed Height: 720mm

### Acoustics:


Verse has been tested in accordance with ISO 717-1:2004 Acoustics – Rating of sound insulation in buildings and of building elements – Airborne sound insulation.

Independent Acoustic Testing shows that Verse can qualify for 3 Green Star Credits for acoustics and can achieve between 28-36Dw at 40dB Ambiance with a Privacy Rating of 64-74, depending on the wall type and material selected.

Normal voice conversations can be heard as a muffled sound in adjoining rooms but cannot be understood.

Verse acoustic performance is comparable to most general use office rooms.

### Panel Layers:

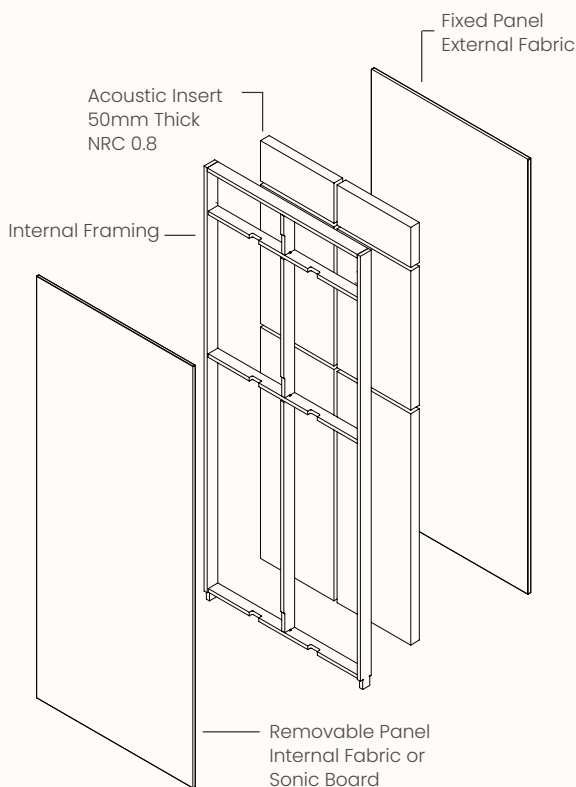

### Air Ventilation:

Verse 2 has Induction airflow to give the larger room cleaner and better air exchange, with a maximum rating of 100L/s for 2-3 people in the space.



### Fire Safety:

The fire safety of all surface materials; timber, upholstery and acoustics materials used in Verse are tested and classified by either national or international standards.

No fire hazardous materials are used in the construction. Timber frames use BAL-19 Victorian Ash with natural fire resistance qualities (Higher rated Blackbutt BAL-29 can be used on request). Upholstered frame MDF substrate meets AS 3837, AS 1859.2 & AS 4266.16. Fabrics used in upholstery meets AS 3837 & ISO 5660-1. Interior and roof Sonic Boards meets EN 13501-1; B-s1,d0. Roof and wall acoustic insulation meets ISO 9705 & AS 5637.1. Laminate boards used in the roof meets AS 1859.2/3, AS 4266.13, AS 1539.3, and AS 3837.

The installation or relocation of Verse is not allowed to adversely impact on the regulatory requirements of a building. The location of Verse has to consider the location of exits and paths of travel to exits so as to not restrict the use or access of them.

Verse roof is adaptable to sprinklers and smoke detectors. Check with your local experts on the specific regulations, however if fire sprinklers are required in the booths a flexible pipe is to be used and at least 100mm of clearance above the ceiling to enable the roof to be lifted to gain access to services in the ceiling.


### Lighting:

Verse comes with 19W/m LED Strip Lighting and Driver suited for different room sizes with 1800lm/m Natural White (4000K).

Verse lighting brightness can be controlled by a dimmer, and turned off by PIR sensor when the room is unoccupied.

### Door / Light Switch Position:

All lighting components are compliant with Asia Pacific regional standards and certification requirements that include, EN 60598-1&2, AS61347.1&2, RCM, CE, RoHs and CCC.

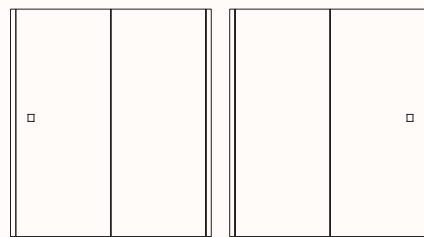

Panel: 600/900mmW

Floor Height: 1050mm

Depth from left/right side: 100mm

External Swing door left or right side

Switch can be placed on left hand or right hand front panel

### Seismic Safety:

Verse can be anchored to the floor with bolts to keep the room upright in case of seismic activity. On request only. If Seismic is required, then depending on local Electrical Regulations alternative wiring looms may be required. Contact us for more information.