

Features:

Verse 3 brings a spacious meeting area with heightened privacy features to your workplace, fully complying with DDA regulations. It fosters a calm setting, reducing workplace noise for discussions and minimizing disruptions caused by private conversations. It's equipped with acoustic elements, air ventilation, and adjustable lighting for comfortable collaboration. Its leveling system ensures it stays balanced with the floor.

Championing their sustainability commitment, Crafted Hardwoods will contribute to reforestation through OneTreePlanted for each Verse purchased with Crafted Hardwoods frames, For every Verse 3 sold, 3 trees will be planted.

Options:

- Media panel can house 42" 65" TV and can be placed with a wall mounted table at sitting or standing height
- 4 standard room sizes (WxD) with 2 available heights
- Door handle left or right side
- White board or cork board accessories

Design: ZENITH DESIGN STUDIO

Warranty: 5 years

(Refer to Zenith Warranty Document for details)

Certifications: GECA, 3 Green Star Credits for acoustics

Finishes:

Frame: Victorian Ash Timber, Crafted

> Hardwood Timber Tasmanian Oak & Blackbutt (Converted low value, juvenile pulp turned into new hardwoods that look and feel like

100-year-old wood)

Front Wall Panel: Laminated Glass 6.76mm

Glazed Door: Frameless Toughened Glass 10mm

(Center only)

Internal Side Walls: Fabric or Sonic Board

Internal Back Walls: Laminated Glass 6.76mm, Fabric or

Sonic Board

External Side Walls: Fabric

Laminated Glass 6.76mm or Fabric External Back Walls:

Ceiling Internal: Sonic Board

Natural White Matt Laminate Ceiling External:

Inner/Outer Floor Track: Black - Satin ZPC_001 Upholstery in fabric categories A, B, C, D, E or F

Refer to Verse Fabric Specification

Frame:







Victorian Ash

Crafted Hardwood Tasmanian

Crafted Hardwood Blackbutt

Sonic Board:












Black ZPET_003 Light Grey ZPET_004

Milky White ZPET_009

Dimensions:




Verse 3.1

OW 2880mm OD 1980mm

H 2200/2400mm (Frame)

OH 2370/2600mm (Including fan box) Internal Room Size: 2700 x 1800mm

Side walls made up of: 3x 600mmW panels Front & back walls made up of: 3x 900mmW panels




Verse 3.3

OW 2880mm OD 2580mm

H 2200/2400mm (Frame)

OH 2370/2600mm (Including fan box) Internal Room Size: 2700 x 2400mm

Side walls made up of: 1x 600mmW & 2x 900mmW panels Front & back walls made up of: 3x 900mmW panels



Verse 3.2


OW 2880mm

OD 2280mm

H 2200/2400mm (Frame)

OH 2370/2600mm (Including fan box) Internal Room Size: 2700 x 2100mm

Side walls made up of: 2x 600mmW & 1x 900mmW panels Front & back walls made up of: 3x 900mmW panels



Verse 3.4

OW 2880mm


OD 2880mm

H 2200/2400mm (Frame)

OH 2370/2600mm (Including fan box) Internal Room Size: 2700 x 2700mm


Side Walls made up of: 3x 900mmW panels Front & back walls made up of: 3x 900mmW panels

Back Panel (Internal) Options:




Option 1

All Glass




Option 1A

Glass with Media Panel



Option 2

All Fabric or Sonic Board Panels



Option 2B

All Fabric or Sonic Board Panels with Media Panel

Front Panel Options:




Option 1

LH: Glass Panel

RH: Glass Panel

C: Door Panel

LH: Door Hinges



Option 2


LH: Glass Panel

RH: Glass Panel

C: Door Panel

RH: Door Hinges

Media Panel:



Standing Height


Media Panel 900mmW: Optional Wall Mounted Table

Fabric or Sonic Board (Internal)

Table Height: 1050mm Table Width: Max 900mmW

TV Bracket Height: 1520mm (Eye Level) TV Size: 42" - 65"

Note: TV & TV bracket not included



Sitting Height

Media Panel 900mmW: Optional Wall Mounted Table

Fabric or Sonic Board (Internal)


Table Height: 720mm

Table Width: Max 900mmW

TV Bracket Height: 1175mm (Eye Level) TV Size: 42" - 65"

Note: TV & TV bracket not included

GPO Panel:

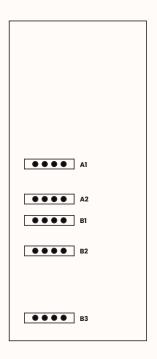

Right Hand Side

••••

•••

••••

••••

•••


Mirrored

Left Hand Side

Panel: 600/900mmW

- Al: 1175mmH
- A2: 945mmH
- B1: 805mmH
- B2: 605mmH
- B3: 165mmH

Accessories:



White Board or Cork Board with Black or Dark Brown Leather Strap

DIA: 600 & 900mm



Gallery Rail

White board or cork board are easily attached and relocated

Power Outlet Options:





GPO + HDMI + USB + DATA

2x GPO + HDMI + DATA





2x GPO + USB + DATA*

2x GPO + USB + HDMI





3x GPO + DATA*

3x GPO + HDMI*





3x GPO + USB*

4x GPO*

Note: *not available as a power outlet option when a media panel has been selected.

Acoustics:


Verse has been tested in accordance with ISO 717-1:2004 Acoustics – Rating of sound insulation in buildings and of building elements – Airborne sound insulation.

Independent Acoustic Testing shows that Verse can qualify for 3 Green Star Credits for acoustics and can achieve between 28-36Dw at 40dB Ambiance with a Privacy Rating of 64-74, depending on the wall type and material selected.

Normal voice conversations can be heard as a muffled sound in adjoining rooms but cannot be understood.

Verse acoustic performance is comparable to most general use office rooms.

Panel Layers:

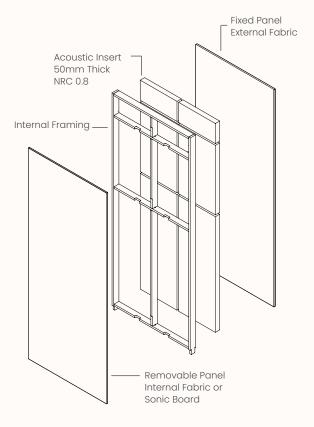

Air Ventilation:

Verse 3 has Induction airflow to give the larger room cleaner and better air exchange, with a maximum rating of 100L/s for 5 people in the space.



Fire Safety:

The fire safety of all surface materials; timber, upholstery and acoustics materials used in Verse are tested and classified by either national or international standards.

No fire hazardous materials are used in the construction. Timber frames use BAL-19 Victorian Ash with natural fire resistance qualities (Higher rated Blackbutt BAL-29 can be used on request). Upholstered frame MDF substrate meets AS 3837, AS 1859.2 & AS 4266.16. Fabrics used in upholstery meets AS 3837 & ISO 5660-1. Interior and roof Sonic Boards meets EN 13501-1; B-s1,d0. Roof and wall acoustic insulation meets ISO 9705 & AS 5637.1. Laminate boards used in the roof meets AS 1859.2/3, AS 4266.13, AS 1539.3, and AS 3837.

The installation or relocation of Verse is not allowed to adversely impact on the regulatory requirements of a building. The location of Verse has to consider the location of exits and paths of travel to exists so as to not restrict the use or access of them.

Verse roof is adaptable to sprinklers and smoke detectors. Check with your local experts on the specific regulations, however if fire sprinklers are required in the booths a flexible pipe is to be used and at least 100mm of clearance above the ceiling to enable the roof to be lifted to gain access to services in the ceiling.


Lighting:

Verse comes with 19W/m LED Strip Lighting and Driver suited for different room sizes with 1800lm/m Natural White (4000K).

Verse lighting brightness can be controlled by a dimmer, and turned off by PIR sensor when the room is unoccupied.

Door / Light Switch Position:

All lighting components are compliant with Asia Pacific regional standards and certification requirements that include, EN 60598-1&2, AS61347.1&2, RCM, CE, RoHs and CCC.



Panel: 600/900mmW
Floor Height: 1050mm
Depth from Left/Right Side: 500mm
Central external swing door
Switch can be placed on left hand or right hand front panel

Seismic Safety:

Verse can be anchored to the floor with bolts to keep the room upright in case of seismic activity. On request only. If Seismic is required, then depending on local Electrical Regulations alternative wiring looms may be required. Contact us for more information.