

zenithinteriors.com

TETRA Acoustic Light

Zenith

Features:

A fusion of acoustic ceiling canopy and light that meets the highest demands, that is Tetra. Combine different sizes and colors to create a powerful and impressive ceiling that makes a difference.

Design: IMPACT ACOUSTIC

Environmental:

- Cradle to Cradle Certified™
- Product qualifies for LEED v4 specifications on VOC emissions in LEED EQ credit
- SUPPORTED BY CLIMATE KIC

Warranty: 12 year product & 2 year lighting

Finishes:






100% PET (min. 60% post-consumer)

ARCHISONIC® is a high-performance sustainable acoustic absorber made from up-cycled plastic bottles.

ARCHISONIC® is manufactured at the highest quality standards, yet slight colour and surface deviations caused by the high degree of recycled fiber are an inevitable part of the product characteristics and do not claim warranty services.

Material varies in colour when shown in monitor or in print.

ARCHISONIC:

					
Shell Pink 102	Jute 920	Soft Coral 516	Ice Blue 304	Winter Sky 410	Spearmint 706
					
Succulent 712	Pacific Ocean 432	Marine Blue 864	Deep Sea 918	Midnight 810	True Navy 194
					
Moss 439	Grove 317	Nordic Pine 311	Fern 180	Sunshine 846	Honeycomb 139
					
Terracotta 239	Electric Orange 464	Hot Pink 140	Poster Red 662	Grape 540	Garnet 724
					
Warm Stone 105	Linen 107	Lichen 160	Snow White 500	Cloud 103	Milk 404
					
Gull 144	Smoke 442	Ground 108	Slate 444	Charcoal 542	Raven 550

Sound Absorption:

DIN ISO 11654

24 mm

aw 0.55 (no airgap)

aw 0.65 (50 mm / 2" air gap)

aw 0.90 (100 mm / 4" air gap)

aw 0.95 (200 mm / 8" air gap)

aw 0.95 (300 mm / 11" air gap)

Key Data:

Voltage:

220 - 240 V

Power:

28W

Light distribution:

Direct

Diffuser:

Microprism

Luminous flux of the luminaire:

2880 lm

Luminous flux of the light source:

3800 lm

Protection class:

I

Colour temperature:



4000K (3000K on request)

Colour consistency:

SDCM3

Life span:

> 50'000 h (L70 B50)

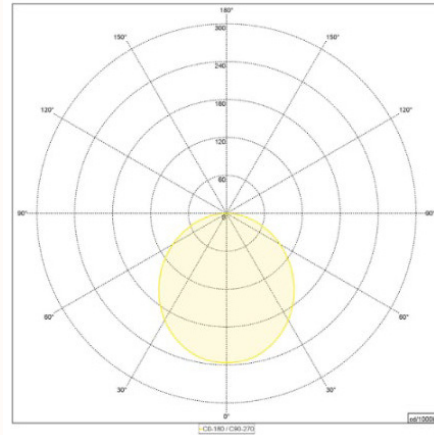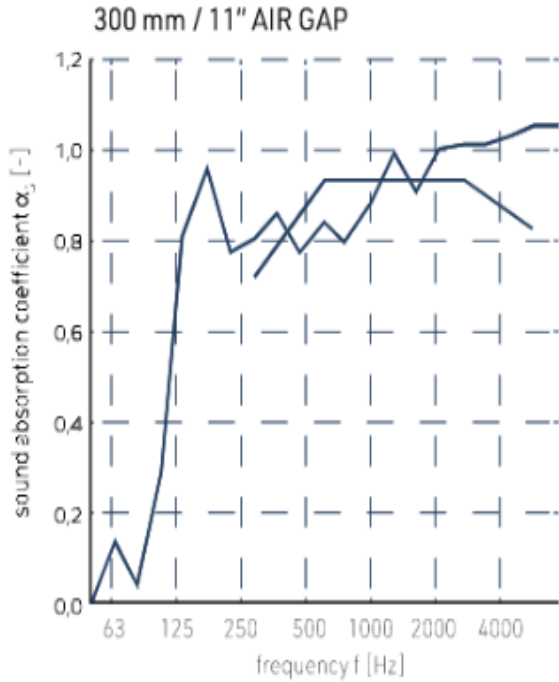

Dimensions




Tetra 400.10

OW 1200mm

OD 1200mm

OH 100mm

Thickness: 24mm




Tetra 400.11

OW 1800mm

OD 1800mm

OH 100mm

Thickness: 24mm




Tetra 400.14

OW 1800mm

OD 1200mm

OH 100mm

Thickness: 24mm



Tetra 400.16

OW 2400mm

OD 1800mm

OH 100mm

Thickness: 24mm