

zenithinteriors.com

# SPARK Acoustic Lighting

## Zenith

### Features:

From afar, this rounded lampshade presents a classic appearance, but get closer and experience the inherent playful character that sparks life to any space without intruding. Pick from five different sizes or go all-in combining dimensions for an exciting dynamic.

**Design:** IMPACT ACOUSTIC

### Options:

- Acoustic panel booster made of felt for additional acoustic absorption.

### Environmental:

- Cradle to Cradle Certified™
- Product qualifies for LEED v4 specifications on VOC emissions in LEED EQ credit
- VOC Emission CDPH 01350 PASS, ISO 16000 (CDPH/EHLB/STANDARD METHOD V1.2.), EN 16516

**Warranty:** 12 year product & 2 year lighting

### Finishes:






100% PET (min. 60% post-consumer)

ARCHISONIC® is a high-performance sustainable acoustic absorber made from up-cycled plastic bottles.

ARCHISONIC® is manufactured at the highest quality standards, yet slight colour and surface deviations caused by the high degree of recycled fiber are an inevitable part of the product characteristics and do not claim warranty services.

Material varies in colour when shown in monitor or in print.

### ARCHISONIC:

					
Shell Pink 102	Jute 920	Soft Coral 516	Ice Blue 304	Winter Sky 410	Spearmint 706
					
Succulent 712	Pacific Ocean 432	Marine Blue 864	Deep Sea 918	Midnight 810	True Navy 194
					
Moss 439	Grove 317	Nordic Pine 311	Fern 180	Sunshine 846	Honeycomb 139
					
Terracotta 239	Electric Orange 464	Hot Pink 140	Poster Red 662	Grape 540	Garnet 724
					
Warm Stone 105	Linen 107	Lichen 160	Snow White 500	Cloud 103	Milk 404
					
Gull 144	Smoke 442	Ground 108	Slate 444	Charcoal 542	Raven 550

### Sound Absorption:

DIN ISO 11654

24 mm


aw 0.55 (no airgap)

aw 0.65 (50 mm / 2" air gap)

aw 0.90 (100 mm / 4" air gap)

aw 0.95 (200 mm / 8" air gap)

aw 0.95 (300 mm / 11" air gap)

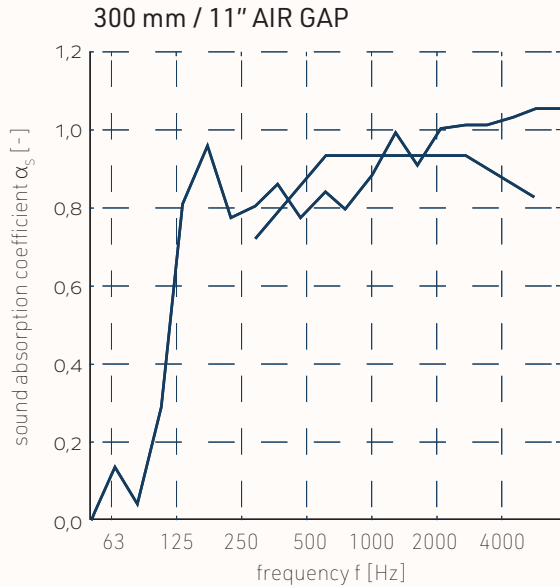

### Key Data:

Voltage:

220 - 240 V

Power:

29W

Light distribution:

Direct

Dimming:

Not dimmable  
(DALI on request)

Diffuser:

Opal  
(Microprism on request)

Luminous flux of the luminaire:

1508lm

Luminous flux of the light source:

2340lm

Protection class:

I

Colour temperature:

4000K,


Colour consistency:

SDCM3

Life span:

> 50'000 h (L70 B50)

### Dimensions




#### Spark 600

Dia 600mm

OH 400mm

Thickness: 12mm




#### Spark 800

Dia 800mm

OH 530mm

Thickness: 12mm




#### Spark 1200

Dia 1200mm

OH 650mm

Thickness: 12mm



#### Spark 1600

Dia 1600mm

OH 850mm

Thickness: 12mm