

EDO Workpod



Features:

Inspired by Tokyo's "dori" (streets) and "yokocho" (laneways), the EDO Streetscape pays homage to the city's sophisticated blend of technology and tradition. Offering a modular kit of parts for creating "utsukushi basho" (beautiful places) for people to work, learn and refresh.

Options:

- Standard or upholstered to the floor sides
- Cable access (soft wiring not included)
- Two-tone upholstery (inner/outer)

Design: SCHAMBURG + ALVISSE

Warranty: 7 years

Certifications: GECA, FSC

Awards: Good Design Award Gold Winner

Finishes:

Upholstered in ZENITH House Fabric or COM. Refer to ZENITH House Finishes Specification for full range. Laminate or polytec table top.

Timber Leg Rail:



American Oak
Natural Finish
Timber



Black Satin
Stain

Table Top:



White
Laminate




Polytec Ravine
Natural Oak




Polytec Ravine
Wenge



Dimensions:



Standard



To the floor




Single

TW min 1300 - max 1670mm
OW min 1430 - max 1800mm
OD 765/875mm*
TH 720/1050mm
OH 1200/1400mm**


Run of 2

TW min 1300 - max 1670mm
OW min 2795 - max 3535mm
OD 765/875mm*
TH 720/1050mm
OH 1200/1400mm**



Run of 3

TW min 1300 - max 1670mm
OW min 4160 - max 5270mm
OD 765/875mm*
TH 720/1050mm
OH 1200/1400mm**



Run of 4

TW min 1300 - max 1670mm
OW min 5525 - max 7005mm
OD 765/875mm*
TH 720/1050mm
OH 1200/1400mm**


Note

*Overall depth 765 to suit work tops 690mm


*Overall depth 875 to suit work tops 800mm

**To the floor - 1200mmH only


Dimensions:



Standard




To the floor




Alternate Run of 2

TW min 1300 – max 1670mm
OW min 2795 – max 3535mm
OD 765/875mm*
TH 720/1050mm
OH 1200/1400mm**



Alternate Run of 3

TW min 1300 – max 1670mm
OW min 4160 – max 5270mm
OD 765/875mm*
TH 720/1050mm
OH 1200/1400mm**



Alternate Run of 4

TW min 1300 – max 1670mm
OW min 5525 – max 7005mm
OD 765/875mm*
TH 720/1050mm
OH 1200/1400mm**


Note

*Overall depth 765 to suit work tops 690mm


*Overall depth 875 to suit work tops 800mm

**To the floor – 1200mmH only


Dimensions:



Standard




To the floor




Pod of 2

TW min 1300 – max 1670mm
OW min 1430 – max 1800mm
OD 1465/1685mm*
TH 720/1050mm
OH 1200/1400mm**

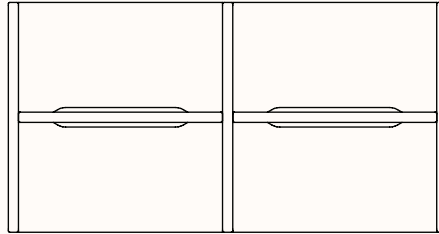


Pod of 4

TW min 1300 – max 1670mm
OW min 1430 – max 1800mm
OD 1465/1685mm*
TH 720/1050mm
OH 1200/1400mm**

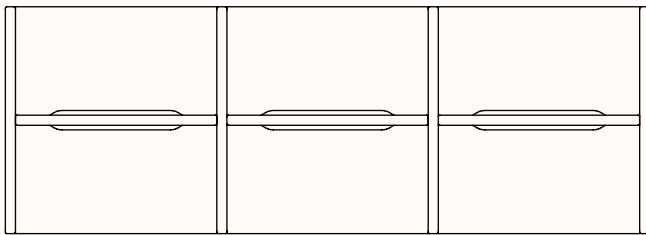

Pod of 6

TW min 1300 – max 1670mm
OW min 4160 – max 5270mm
OD 1465/1685mm*
TH 720/1050mm
OH 1200/1400mm**

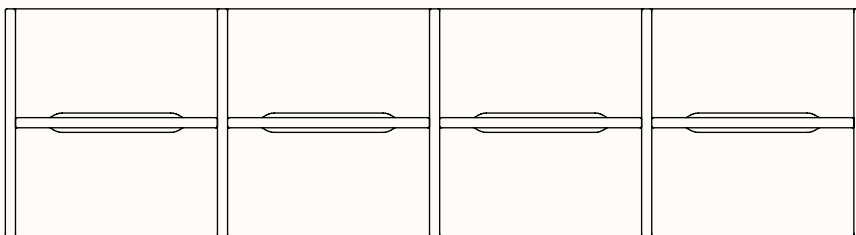

Pod of 8

TW min 1300 – max 1670mm
OW min 5525 – max 7005mm
OD 1465/1685mm*
TH 720/1050mm
OH 1200/1400mm**

Note

*Overall depth 1465 to suit work tops 690mm

*Overall depth 1685 to suit work tops 800mm

**To the floor – 1200mmH only