

zenithinteriors.com

VERSE 1

Zenith

Features:

A privacy room for the individual, Verse 1 allows the employee to remove themselves from the distractions of the open and bustling workplace. It's a room within the room, where employees can take a private phone call or host an online meeting without interruption. It is also fitted with a shelf for employees to perch their devices on for concentrated work as well as a gallery rail to hang tools for brainstorming. Verse 1 offers an acoustic setting with adaptable lighting and ventilation for a balanced, comfortable environment that promotes focus.

Championing their sustainability commitment, Crafted Hardwoods will contribute to reforestation through OneTreePlanted for each Verse purchased with Crafted Hardwoods frames. For every Verse 1 sold, 1 tree will be planted.

Option:

- White board or cork board accessories

Design: ZENITH DESIGN STUDIO

Warranty: 5 years
(Refer to Zenith Warranty for details)

Certifications: GECA, 3 Green Star Credits for acoustics

Finishes:

Frame & Shelf:	Victorian Ash Timber or Crafted Hardwood Timber Tasmanian Oak & Blackbutt (Converted low value, juvenile pulp turned into new hardwoods that look and feel like 100-year-old wood)
Shelf Option:	Natural White & Black Woodmatt Laminate
Glazed Door:	Frameless Toughened Glass 10mm
Internal Side Wall:	Fabric or Sonic Board
Internal Back Wall:	Laminated Glass 6.76mm, Fabric or Sonic Board
External Side Wall:	Fabric
External Back Wall:	Laminated Glass 6.76mm or Fabric
Ceiling Internal:	Sonic Board
Ceiling External:	Natural White Matt Laminate
Inner/Outer Floor Track:	Black - Satin ZPC_001
Floor:	Carpet - Interface Reflex Coal
Upholstery in fabric categories A, B, C, D & E	Refer to Verse Fabric Specification

Frame & Shelf:

				
Victorian Ash	Crafted Hardwood Tasmanian Oak	Crafted Hardwood Blackbutt	Natural White Matt Laminate shelf only	Black Woodmatt Laminate shelf only


Sonic Board:

				
Black ZPET_003	Light Grey ZPET_004	Silver ZPET_006	Ash ZPET_007	Milky White ZPET_009

Carpet:


Interface Reflex Coral


Dimensions:

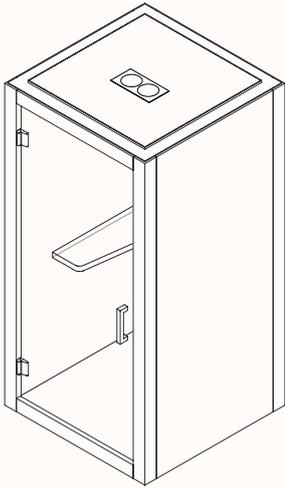

Verse 1


OW 1080mm
 OD 1080mm
 OH 2200mm
 Internal Room Size: 900 x 900mm

Accessories:



White Board or Cork Board with Black or Dark Brown Leather Strap


DIA: 600mm




Gallery Rail

White board or cork board are easily attached and relocated

Option 1:

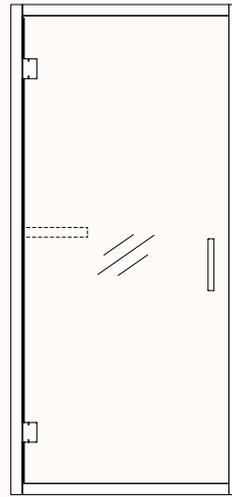

Door with RH Handle

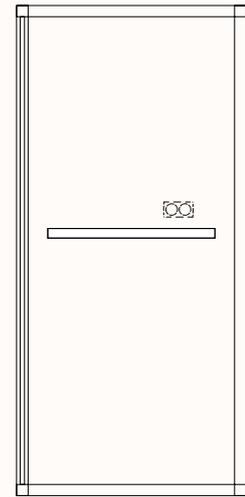


Shelf Panel with Power Outlet

Panel: 900mmW
 Power Outlet Height: 1130mm


— GPO
 — Shelf

— Booth Floor



Power Outlet


GPO + USBC & USBA




Verse LH Shelf

OW 710mm
 OD 180 & 330mm
 OH 36mm
 Installed Height: 1050mm

Option 2:

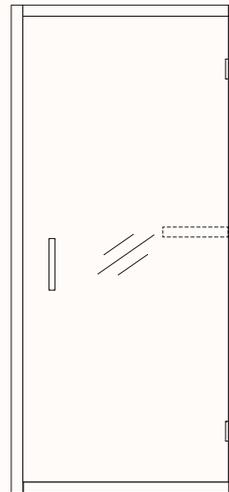


Door with LH Handle

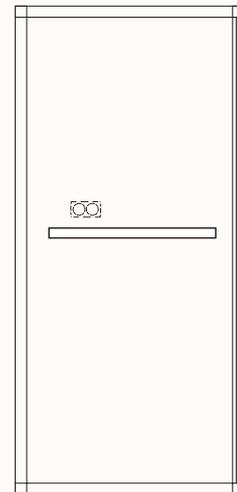


Shelf Panel with Power Outlet

Panel: 900mmW
 Power Outlet Height: 1130mm



Power Outlet

GPO + USBC & USBA



Verse RH Shelf

OW 710mm
 OD 330 & 180mm
 OH 36mm
 Installed Height: 1050mm

Acoustics:


Verse has been tested in accordance with ISO 717-1:2004 Acoustics – Rating of sound insulation in buildings and of building elements – Airborne sound insulation.

Independent Acoustic Testing shows that Verse can qualify for 3 Green Star Credits for acoustics and can achieve between 28-36Dw at 40dB Ambiance with a Privacy Rating of 64-74, depending on the wall type and material selected.

Normal voice conversations can be heard as a muffled sound in adjoining rooms but cannot be understood.

Verse acoustic performance is comparable to most general use office rooms.

Panel Layers:

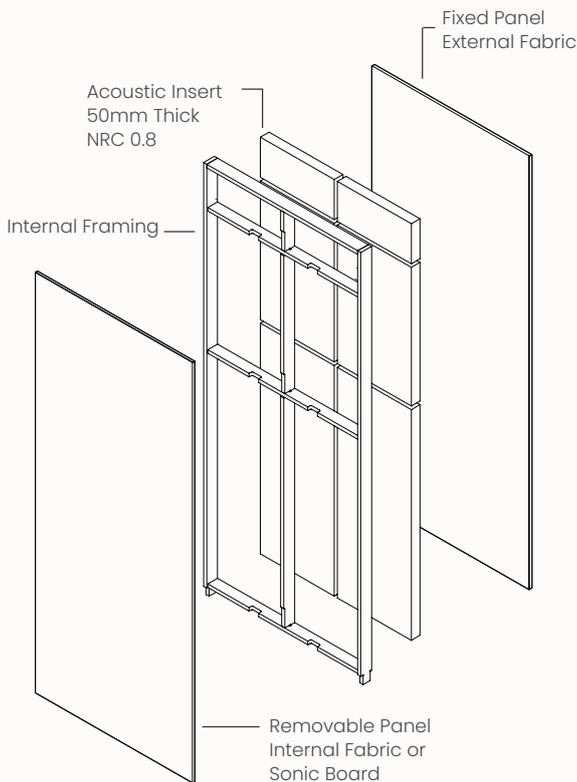

Air Ventilation:

Verse 1 has Extraction airflow suited to small spaces, with a maximum rating of 30L/s for 1 person in the space.



Fire Safety:

The fire safety of all surface materials; timber, upholstery and acoustics materials used in Verse are tested and classified by either national or international standards.

No fire hazardous materials are used in the construction. Timber frames use BAL-19 Victorian Ash with natural fire resistance qualities (Higher rated Blackbutt BAL-29 can be used on request). Upholstered frame MDF substrate meets AS 3837, AS 1859.2 & AS 4266.16. Fabrics used in upholstery meets AS 3837 & ISO 5660-1. Interior and roof Sonic Boards meets EN 13501-1; B-s1,d0. Roof and wall acoustic insulation meets ISO 9705 & AS 5637.1. Laminate boards used in the roof meets AS 1859.2/3, AS 4266.13, AS 1539.3, and AS 3837.

The installation or relocation of Verse is not allowed to adversely impact on the regulatory requirements of a building. The location of Verse has to consider the location of exits and paths of travel to exist so as to not restrict the use or access of them.

Verse roof is adaptable to sprinklers and smoke detectors.


Lighting:

Verse 1 comes with 13W Down Light and a sensor suited for a small space with three built in settings: 800lm Warm White (3000K), 850lm Neutral White (4000K), or 900lm White (5700K).

Verse lighting brightness can be controlled by a dimmer, and turned off by PIR sensor when the room is unoccupied.

All lighting components are compliant with Asia Pacific regional standards and certification requirements that include, EN 60598-1&2, AS61347.1&2, RCM, CE, RoHs and CCC.

Door / Light Switch Position:

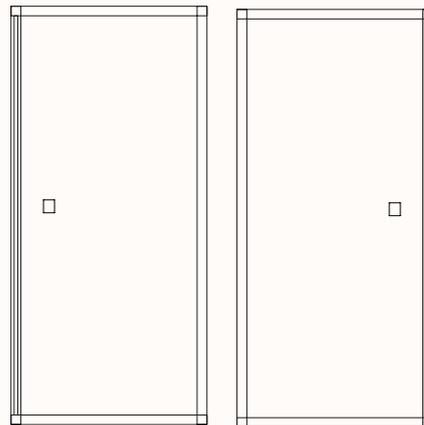

Panel: 900mmW
Switch Height: 960mm
Depth from Left/Right Side: 100mm
Switch panel opposite shelf panel

Seismic Safety:

Verse can be anchored to the floor with bolts to keep the room upright in case of seismic activity. On request only. Contact us for more information.