

zenithinteriors.com

VERSE 1

Timber with Floor

Zenith

Features:

A privacy room for the individual, Verse 1 allows the occupants to remove themselves from the distractions of the open and bustling workplace. It's a room within the room, where employees can take a private phone call or host an online meeting without interruption. It is also fitted with a shelf for employees to perch their devices on for concentrated work as well as a gallery rail to hang tools for brainstorming.

Verse 1 creates ambience, minimising the noise of the office for the employee in private mode and minimising the noise of the conversations taking place inside the privacy room for those focused in the central workspace.

This acoustic performance is matched with air ventilation and adjustable lighting to create a balanced and comfortable environment that fosters focus. The unique levelling system allows Verse to be levelled insitu to the floor.

Options:

- White board or cork board accessories

Design: ZENITH DESIGN STUDIO

Warranty: 7 years

Exception:

2 Years - Electrical components including soft wiring

1 Year - Lighting elements

Certifications: GECA, Supports achievement of up to three Green Star credits for acoustics

Finishes:

Frame:	American Ash
Shelf Option:	Melamine or Ash
Glazed Door:	Frameless Toughened Glass 10mm
Internal Side Wall:	Fabric or Sonic Board
Internal Back Wall:	Laminated Glass 6.76mm, Fabric or Sonic Board
External Side Wall:	Fabric
External Back Wall:	Laminated Glass 6.76mm or Fabric
Ceiling Internal:	Sonic Board
Ceiling External:	Standard White 1630 Melamine
	Upholstery in fabric categories A, B & C
	Refer to Verse Fabric Specification

Frame:



American Ash

Carpet:



Interface
Reflex Coral

Shelf:



White 1630
Melamine



Standard
Black 0080
Melamine



American Ash

Sonic Board:



Light Grey
ZPET_004



Ash
ZPET_007



Olive
ZPET_010




Shadow
ZPET_011



Cloud
ZPET_012


Dimensions:

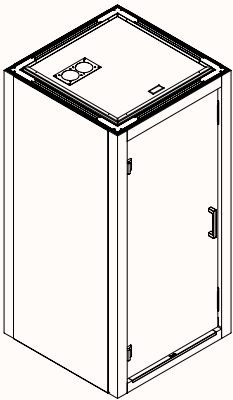

Verse 1


OW 1080mm
 OD 1080mm
 OH 2200mm
 Internal Room Size: 900 x 900mm

Accessories:



White Board or Cork Board with Black or Dark Brown Leather Strap

DIA: 600mm




Gallery Rail

White board or cork board are easily attached and relocated

Door Handle Options:




Magnetic Pull Handle




Latch Lever

Option 1:

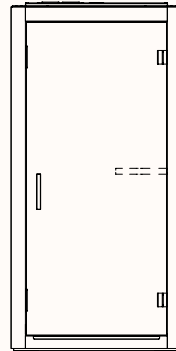


RH Door (Hinge)

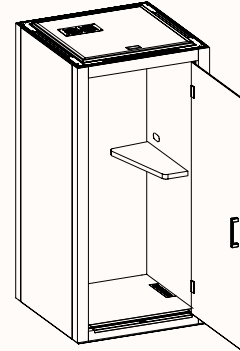


Shelf Panel with Power Outlet

Panel: 900mmW
 Power Outlet Height: 1130mm



Power Outlet


GPO + 2x USBA (China)
 GPO + USBA + USBC
 (All Other Regions)




Verse RH Shelf

OW 710mm
 OD 330 & 180mm
 OH 50mm
 Installed Height: 1050mm

Option 2:

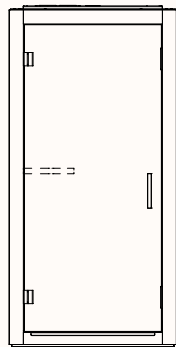


LH Door (Hinge)

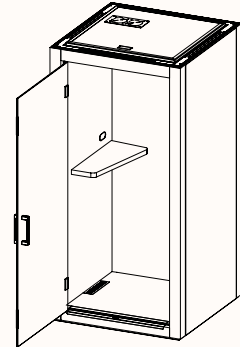


Shelf Panel with Power Outlet

Panel: 900mmW
 Power Outlet Height: 1130mm



Power Outlet

GPO + 2x USBA (China)
 GPO + USBA + USBC
 (All Other Regions)



Verse LH Shelf

OW 710mm
 OD 180 & 330mm
 OH 50mm
 Installed Height: 1050mm

zenithinteriors.com

VERSE 1

Timber no Floor

Zenith



Features:

A privacy room for the individual, Verse 1 allows the employee to remove themselves from the distractions of the open and bustling workplace. It's a room within the room, where employees can take a private phone call or host an online meeting without interruption. It is also fitted with a shelf for employees to perch their devices on for concentrated work as well as a gallery rail to hang tools for brainstorming.

Verse 1 creates ambience, minimising the noise of the office for the employee in private mode and minimising the noise of the conversations taking place inside the privacy room for those focused in the central workspace.

This acoustic performance is matched with air ventilation and adjustable lighting to create a balanced and comfortable environment that fosters focus. The unique levelling system allows Verse to be levelled insitu to the floor.

Options:

- White board or cork board accessories

Design: ZENITH DESIGN STUDIO

Warranty: 7 years

Exception:

2 Years - Whiteboard & Corkboard

2 Years - Electrical components including soft wiring

1 Year - Lighting elements

Certifications: GECA, Supports achievement of up to three Green Star credits for acoustics

Finishes:

Frame:	American Ash
Shelf Option:	Melamine or Ash
Glazed Door:	Frameless Toughened Glass 10mm
Internal Side Wall:	Fabric or Sonic Board
Internal Back Wall:	Laminated Glass 6.76mm, Fabric or Sonic Board
External Side Wall:	Fabric
External Back Wall:	Laminated Glass 6.76mm or Fabric
Ceiling Internal:	Sonic Board
Ceiling External:	Standard White 1630 Melamine
	Upholstery in fabric categories A, B & C
	Refer to Verse Fabric Specification

Frame:



American Ash

Shelf:



White 1630
Melamine



Standard
Black 0080
Melamine



American Ash

Sonic Board:



Light Grey
ZPET_004



Ash
ZPET_007



Olive
ZPET_010




Shadow
ZPET_011



Cloud
ZPET_012


Dimensions:

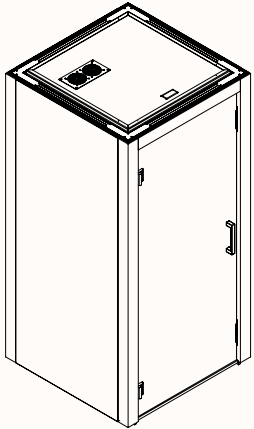

Verse 1


OW 1080mm
 OD 1080mm
 OH 2200mm
 Internal Room Size: 900 x 900mm

Accessories:



White Board or Cork Board with Black or Dark Brown Leather Strap

DIA: 600mm




Gallery Rail

White board or cork board are easily attached and relocated

Door Handle Options:




Magnetic Pull Handle




Latch Lever

Option 1:

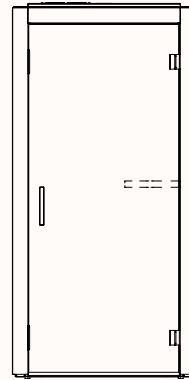


RH Door (Hinge)

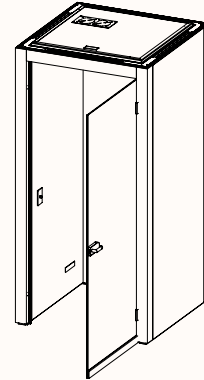


Shelf Panel with Power Outlet

Panel: 900mmW
 Power Outlet Height: 1130mm



Power Outlet


GPO + 2x USB (China)
 GPO + USB + USBC
 (All Other Regions)




Verse RH Shelf

OW 710mm
 OD 330 & 180mm
 OH 50mm
 Installed Height: 1050mm

Option 2:

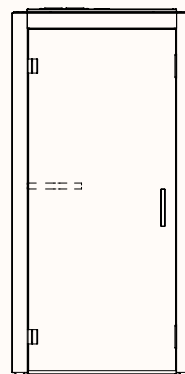


LH Door (Hinge)

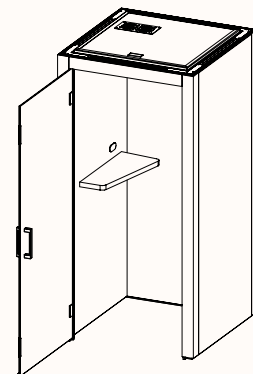


Shelf Panel with Power Outlet

Panel: 900mmW
 Power Outlet Height: 1130mm



Power Outlet

GPO + 2x USB (China)
 GPO + USB + USBC
 (All Other Regions)



Verse LH Shelf

OW 710mm
 OD 180 & 330mm
 OH 50mm
 Installed Height: 1050mm

Acoustics:


Verse has been tested in accordance with ISO 717-1:2004 Acoustics – Rating of sound insulation in buildings and of building elements – Airborne sound insulation.

Independent Acoustic Testing shows that Verse can qualify for 3 Green Star Credits for acoustics and can achieve between 28–36Dw at 40dB Ambiance with a Privacy Rating of 64–74, depending on the wall type and material selected.

Normal voice conversations can be heard as a muffled sound in adjoining rooms but cannot be understood.

Verse acoustic performance is comparable to most general use office rooms.

Panel Layers:

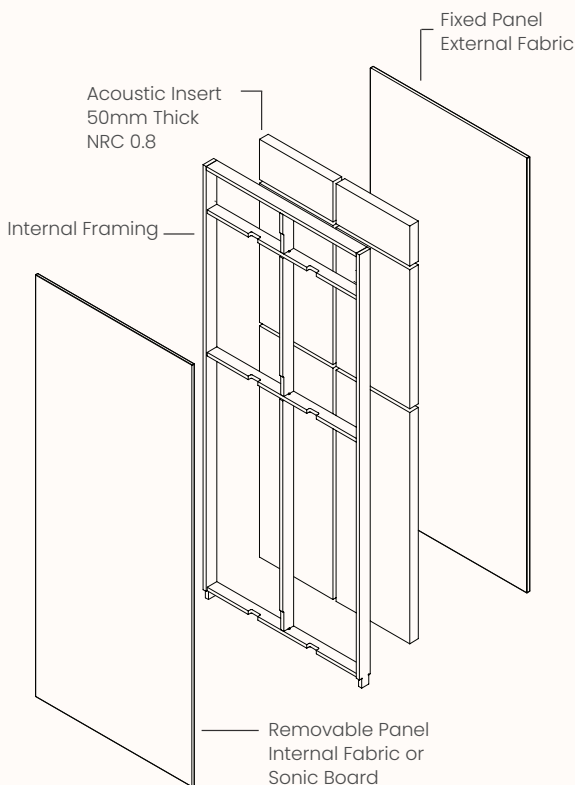

Air Ventilation:

Verse 1 has Extraction airflow suited to small spaces, with a maximum rating of 30L/s for 1 person in the space.



Fire Safety:

The fire safety of all surface materials; timber, upholstery and acoustics materials used in Verse are tested and classified by either national or international standards.

No fire hazardous materials are used in the construction. Timber frames use BAL-19 Victorian Ash with natural fire resistance qualities (Higher rated Blackbutt BAL-29 can be used on request). Upholstered frame MDF substrate meets AS 3837, AS 1859.2 & AS 4266.16. Fabrics used in upholstery meets AS 3837 & ISO 5660-1. Interior and roof Sonic Boards meets EN 13501-1; B-s1,d0. Roof and wall acoustic insulation meets ISO 9705 & AS 5637.1. Laminate boards used in the roof meets AS 1859.2/3, AS 4266.13, AS 1539.3, and AS 3837.

The installation or relocation of Verse is not allowed to adversely impact on the regulatory requirements of a building. The location of Verse has to consider the location of exits and paths of travel to exits so as to not restrict the use or access of them.

Verse roof is adaptable to sprinklers and smoke detectors. Check with your local experts on the specific regulations, however if fire sprinklers are required in the booths a flexible pipe is to be used and at least 100mm of clearance above the ceiling to enable the roof to be lifted to gain access to services in the ceiling.


Lighting:

Verse 1 comes with 13W Down Light and a sensor suited for a small space with three built in settings: 800lm Warm White (3000K), 850lm Neutral White (4000K), or 900lm White (5700K).

Verse lighting brightness can be controlled by a dimmer, and turned off by PIR sensor when the room is unoccupied.

Door / Light Switch Position:

All lighting components are compliant with Asia Pacific regional standards and certification requirements that include, EN 60598-1&2, AS61347.1&2, RCM, CE, RoHs and CCC.



Panel: 900mmW
Switch Height: 960mm
Depth from Left/Right Side: 100mm
Switch panel opposite shelf panel

Seismic Safety:

Verse can be anchored to the floor with bolts to keep the room upright in case of seismic activity. On request only. If Seismic is required, then depending on local Electrical Regulations alternative wiring looms may be required. Contact us for more information.